




Winchester 40 S&W (180) Hollow Point

- Symbol: **RA40180HP** – Winchester Ranger Hollow Point
- Shellcase: 40 S&W brass shellcase
- Bullet: 180 grain (11.7 gram) Hollow Point
Brass jacket, lead core
Diameter .4000 inch (10.16 mm)
- Powder: Clean burning, low flash
- Primer: Winchester non-corrosive primer – boxer type
- Accuracy: Product Mean of 2.5 inches (6.4 cm) Extreme Spread
5 shot targets at 50 yards (45.7 m) from a 4 inch (10.2 cm) SAAMI test barrel
- Velocity: 1015 ft/sec (309 m/s) nominal at 15 ft (4.6 m)
Fired in a 4 inch (10.2 cm) standard SAAMI test barrel
- Energy: 412 ft-lb (559 joules)
- Pressure: 35,000 psi max. average (2,414 bars)
- Waterproofing: Lacquer applied to primer annulus

NOMINAL DIMENSIONS SHOWN

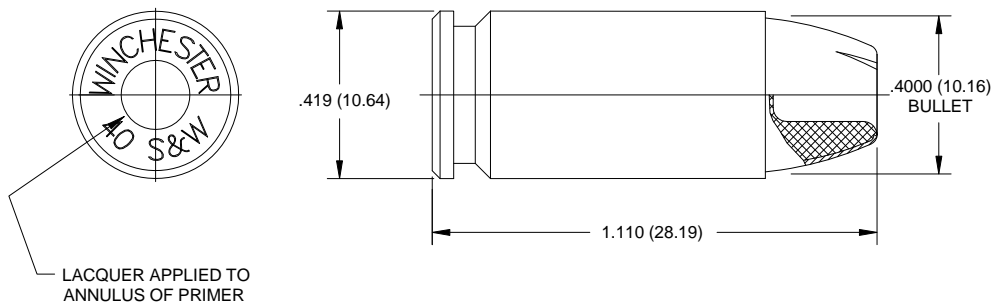

USA40JHP

REF. W1629

INFORMATION PUBLISHED HEREIN IS SUBJECT TO CHANGE AT MANUFACTURER'S DISCRETION WITHOUT NOTICE.

PRODUCT INFORMATION SHEET #251
Rev. 9-28-2004

OLIN CORPORATION • WINCHESTER DIVISION • 427 NORTH SHAMROCK STREET • EAST ALTON, IL 62024-1197
TELEPHONE: 618 258-2000 • WEB SITE: www.winchester.com